


LAN Cables

Category 6 4 Pair

Model Code: F/UTP

KEYLAN

A Product of  KEYSTONE CABLE

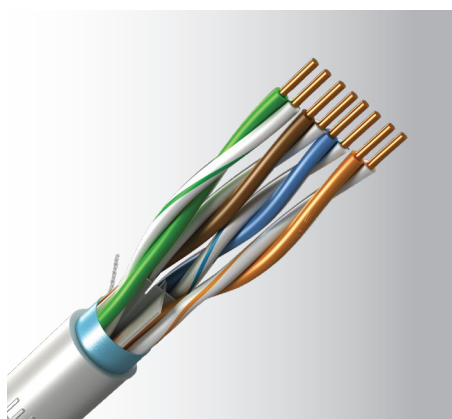

Related Products



Patch Panels
(Page 23)



Patch Cords
(Page 24)



Shielded
Modular Jacks
(Page 21)

Application :	- High Speed Horizontal Cabling (250 MHz) 10/100/1000 Base-T 100 Mbps Fast Ethernet; 155/622 Mbps ATM; Gigabit Ethernet - EMI Proof
Construction :	Solid bare copper, HDPE insulated, cross-web filler, aluminium/polyester tape with drain wire, RoHS compliant PVC, LSZH, or HDPE sheathed cable
Insulation colour :	- Blue & White/blue stripe - Orange & White/orange stripe - Green & White/green stripe - Brown & White/brown stripe
Sheath colour :	Grey or Blue (RoHS compliant PVC), Orange (LSZH), Black (HDPE), or as per order
Specification :	ANSI/TIA-568.2-D, ISO/IEC 11801, IEC 61156-5
Flame test :	UL 1581 (CMX), UL 1685 (CM), UL 1666 (CMR), IEC 60332-1-2
LSZH test :	IEC 60754, IEC 61034-2

Part No.	Conductor	Pair	Approx. Overall Diam.	Standard Length	Approx. Weight	Packaging
			(mm)	(m)	(kg/305m)	
434P***06	Solid Bare Copper (24 AWG)	4	7.2	305	16	Reel in Box
444P***06	Solid Bare Copper (23 AWG)		7.4		17	

Electrical Properties at 20°C

Conductor Resistance	≤ 9.38Ω/100m
Resistance Unbalance	≤ 5%
Mutual Capacitance	≤ 5.6nF/100m
Capacitance Unbalance	≤ 330pF/100m
Characteristics Impedance	100 ± 15Ω

Electrical Data at 20°C

Frequency	ATTENUATION Max.	NEXT Min.	PSNEXT Min.	ELFEXT Min.	PSELFEXT Min.	RL Min.	DELAY Max.	SKEW Max.
(MHz)	(dB/100m)	(dB)	(dB)	(dB/100m)	(dB/100m)	(dB)	(ns/100m)	(ns/100m)
0.772	1.8	76.0	74.0	70.0	67.0	-	-	-
1	2.0	74.3	72.3	67.8	64.8	20.0	570	45
4	3.8	65.3	63.3	55.8	52.8	23.0	-	-
8	5.3	60.8	58.8	49.7	46.7	24.5	-	-
10	6.0	59.3	57.3	47.8	44.8	25.0	545	45
16	7.6	56.2	54.2	43.7	40.7	25.0	-	-
20	8.5	54.8	52.8	41.8	38.8	25.0	-	-
25	9.5	53.3	51.3	39.8	36.8	24.3	-	-
31.25	10.7	51.9	49.9	37.9	34.9	23.6	-	-
62.5	15.4	47.4	45.4	31.9	28.9	21.5	-	-
100	19.8	44.3	42.3	27.8	24.8	20.1	-	-
200	29.0	39.8	37.8	21.8	18.8	18.0	-	-
250	32.8	38.3	36.3	19.8	16.8	17.3	536	45