


## Signal Cables

250V or 300/500V Multi-Pair  
PVC Insulated, Braided Screen, PVC Sheathed Flexible Cable

Description: CU/PVC/TCWB/PVC

Model Code: LiYCY-TP

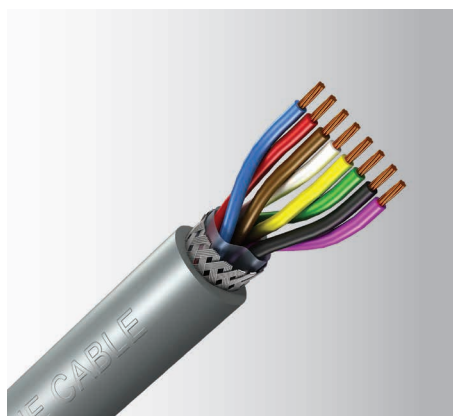

|                         |  |
|-------------------------|--|
| Application :           | For computer, data transmission, office equipment process control, and instrumentation usage where EMI protection is required.           |
| Voltage rating :        | 250V (0.14 ~ 0.25mm <sup>2</sup> ); 300/500V (0.34 ~ 0.5mm <sup>2</sup> )  |
| Construction :          | Fine plain annealed copper, PVC insulated, twisted pairs, polyester tape wrapping, tinned copper wire braided screen, PVC sheathed cable |
| Core colour :           | According to Table 14 (page 48)  |
| Sheath colour :         | Grey   |
| Specification :         | VDE 0812, IEC 60332-1-2  |
| Operating temperature : | Static : -30°C ~ 70°C  |
|                         | Flexing : -5°C ~ 70°C  |
| Insulation resistance : | Min. 200MΩ·km  |

| No. of Pair | Conductor                       |                              | Insulation Thickness (mm) | Part No.        | Approx. Overall Diam. (mm) | Approx. Weight (kg/km) |
|-------------|---------------------------------|------------------------------|---------------------------|-----------------|----------------------------|------------------------|
|             | Nominal Area (mm <sup>2</sup> ) | No./Diam. of Strand (no./mm) |                           |                 |                            |                        |
| 2           | 0.14                            | 18/0.10                      | 0.3                       | <b>002P3828</b> | 5.6                        | 40                     |
| 3           |                                 |                              |                           | <b>003P3828</b> | 5.8                        | 49                     |
| 4           |                                 |                              |                           | <b>004P3828</b> | 6.2                        | 54                     |
| 5           |                                 |                              |                           | <b>005P3828</b> | 6.5                        | 66                     |
| 6           |                                 |                              |                           | <b>006P3828</b> | 7.3                        | 85                     |
| 8           |                                 |                              |                           | <b>008P3828</b> | 8.2                        | 97                     |
| 10          |                                 |                              |                           | <b>000P3828</b> | 8.7                        | 110                    |
| 12          |                                 |                              |                           | <b>008P3828</b> | 9.3                        | 142                    |
| 14          |                                 |                              |                           | <b>00DP3828</b> | 10.0                       | 148                    |
| 16          |                                 |                              |                           | <b>00FP3828</b> | 10.7                       | 155                    |
| 18          |                                 |                              |                           | <b>00HP3828</b> | 11.0                       | 171                    |
| 20          |                                 |                              |                           | <b>00KP3828</b> | 11.3                       | 184                    |
| 25          | <b>00PE3828</b>                 | 12.5                         | 238                       |                 |                            |                        |
| 2           | 0.25                            | 14/0.15                      | 0.3                       | <b>012P3828</b> | 7.0                        | 54                     |
| 3           |                                 |                              |                           | <b>013P3828</b> | 7.1                        | 68                     |
| 4           |                                 |                              |                           | <b>014P3828</b> | 7.6                        | 81                     |
| 5           |                                 |                              |                           | <b>015P3828</b> | 8.1                        | 102                    |
| 6           |                                 |                              |                           | <b>016P3828</b> | 8.3                        | 115                    |
| 8           |                                 |                              |                           | <b>018P3828</b> | 10.3                       | 130                    |
| 10          |                                 |                              |                           | <b>010P3828</b> | 11.0                       | 158                    |
| 12          |                                 |                              |                           | <b>01BP3828</b> | 11.6                       | 190                    |
| 14          |                                 |                              |                           | <b>01DP3828</b> | 12.0                       | 213                    |
| 16          |                                 |                              |                           | <b>01FP3828</b> | 13.0                       | 238                    |
| 18          |                                 |                              |                           | <b>01HP3828</b> | 13.2                       | 248                    |
| 20          |                                 |                              |                           | <b>01KP3828</b> | 13.7                       | 275                    |
| 25          | <b>01PE3828</b>                 | 16.1                         | 344                       |                 |                            |                        |

### Current rating

Please refer to Table 15 (Page 49)

For Rating Factors, please refer to Table 7 (Page 45)

# Signal Cables

250V or 300/500V Multi-Pair  
PVC Insulated, Braided Screen, PVC Sheathed Flexible Cable  
Description: CU/PVC/TCWB/PVC  
Model Code: LiYCY-TP

| No. of Pair | Conductor                          |                                 | Insulation        | Part No.        | Approx. Overall Diam.<br>(mm) | Approx. Weight<br>(kg/km) |                 |     |     |
|-------------|------------------------------------|---------------------------------|-------------------|-----------------|-------------------------------|---------------------------|-----------------|-----|-----|
|             | Nominal Area<br>(mm <sup>2</sup> ) | No./Diam. of Strand<br>(no./mm) | Thickness<br>(mm) |                 |                               |                           |                 |     |     |
| 2           | 0.34                               | 7/0.25                          | 0.4               | <b>022P3866</b> | 7.3                           | 65                        |                 |     |     |
| 3           |                                    |                                 |                   | <b>023P3866</b> | 7.5                           | 78                        |                 |     |     |
| 4           |                                    |                                 |                   | <b>024P3866</b> | 8.0                           | 90                        |                 |     |     |
| 5           |                                    |                                 |                   | <b>025P3866</b> | 8.9                           | 111                       |                 |     |     |
| 6           |                                    |                                 |                   | <b>026P3866</b> | 10.5                          | 130                       |                 |     |     |
| 8           |                                    |                                 |                   | <b>028P3866</b> | 10.9                          | 150                       |                 |     |     |
| 10          |                                    |                                 |                   | <b>020P3866</b> | 12.0                          | 190                       |                 |     |     |
| 12          |                                    |                                 |                   | <b>028P3866</b> | 13.2                          | 220                       |                 |     |     |
| 14          |                                    |                                 |                   | <b>02DP3866</b> | 13.6                          | 245                       |                 |     |     |
| 16          |                                    |                                 |                   | <b>02FP3866</b> | 15.1                          | 250                       |                 |     |     |
| 18          |                                    |                                 |                   | <b>02HP3866</b> | 15.5                          | 275                       |                 |     |     |
| 20          |                                    |                                 |                   | <b>02KP3866</b> | 16.2                          | 288                       |                 |     |     |
| 25          |                                    |                                 |                   | <b>02PE3866</b> | 17.9                          | 400                       |                 |     |     |
| 2           |                                    |                                 |                   | 0.5             | 16/0.20                       | 0.4                       | <b>042P3866</b> | 7.8 | 93  |
| 3           |                                    |                                 |                   |                 |                               |                           | <b>043P3866</b> | 8.8 | 109 |
| 4           | <b>044P3866</b>                    | 9.4                             | 136               |                 |                               |                           |                 |     |     |
| 5           | <b>045P3866</b>                    | 10.5                            | 152               |                 |                               |                           |                 |     |     |
| 6           | <b>046P3866</b>                    | 11.4                            | 198               |                 |                               |                           |                 |     |     |
| 8           | <b>048P3866</b>                    | 12.5                            | 259               |                 |                               |                           |                 |     |     |
| 10          | <b>040P3866</b>                    | 13.5                            | 320               |                 |                               |                           |                 |     |     |
| 12          | <b>04BP3866</b>                    | 14.2                            | 354               |                 |                               |                           |                 |     |     |
| 14          | <b>04DP3866</b>                    | 15.3                            | 401               |                 |                               |                           |                 |     |     |
| 16          | <b>04FP3866</b>                    | 16.2                            | 459               |                 |                               |                           |                 |     |     |
| 18          | <b>04HP3866</b>                    | 17.5                            | 522               |                 |                               |                           |                 |     |     |
| 20          | <b>04KP3866</b>                    | 19.5                            | 580               |                 |                               |                           |                 |     |     |
| 25          | <b>04PE3866</b>                    | 22.5                            | 740               |                 |                               |                           |                 |     |     |

**Current rating**  
Please refer to Table 15 (Page 49)  
For Rating Factors, please refer to Table 7 (Page 45)

**Table 6 : Correction Factors for Ambient Temperature & Group Installation**

Correction for groups of more than one circuit of single-core cables, or more than one multi-core cable.

| Reference Methods of Installation  |            | Correction Factor (Cg)                  |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--|------------|---|------|------|------|------|------|------|------|------|------|------|------|------|------|
|  |            | Number of Circuits or Multi-Core Cables |      |      |      |      |      |      |      |      |      |      |      |      |      |
|  |            | 2                                       | 3    | 4    | 5    | 6    | 7    | 8    | 9    | 10   | 12   | 14   | 16   | 18   | 20   |
| Enclosed (Method 3 or 4) or bunched and clipped to a non-metallic surface (Method 1) |            | 0.80                                    | 0.70 | 0.65 | 0.60 | 0.57 | 0.54 | 0.52 | 0.50 | 0.48 | 0.45 | 0.43 | 0.41 | 0.39 | 0.38 |
| Single layer clipped to a non-metallic surface (Method 1)                            | Touching   | 0.85                                    | 0.79 | 0.75 | 0.73 | 0.72 | 0.72 | 0.71 | 0.70 | -    | -    | -    | -    | -    | -    |
|  | Spaced*    | 0.94                                    | 0.90 | 0.90 | 0.90 | 0.90 | 0.90 | 0.90 | 0.90 | 0.90 | 0.90 | 0.90 | 0.90 | 0.90 | 0.90 |
| Single layer multi-core on a perforated metal cable tray (Method 11)                 | Touching   | 0.86                                    | 0.81 | 0.77 | 0.75 | 0.74 | 0.73 | 0.73 | 0.72 | 0.71 | 0.70 | -    | -    | -    | -    |
|  | Spaced*    | 0.91                                    | 0.89 | 0.88 | 0.87 | 0.87 | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| Single layer single-core on a perforated metal cable tray, touching (Method 11)      | Horizontal | 0.90                                    | 0.85 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
|  | Vertical   | 0.85                                    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| Single layer multi-core touching on ladder supports                                  |            | 0.86                                    | 0.82 | 0.80 | 0.79 | 0.78 | 0.78 | 0.78 | 0.77 | -    | -    | -    | -    | -    | -    |

\* Space means a clearance between adjacent surfaces of at least one cable Diam. (D<sub>e</sub>). Where the horizontal clearance between adjacent cables exceeds 2 D<sub>e</sub>, no correction factor need to be applied.

Note : 1 The factors in the table are applicable to a group of cables of all the same sizes. The value of the current derived from application of the appropriate factors is the maximum continuous current to be carried by any of the cables in the group.

2 If, due to known operating conditions, a cable is expected to carry not more than 30% of its grouped rating, it may be ignored for the purpose of obtaining the rating factor for the rest of the group.

For example, a group of N loaded cables would normally require a group reduction factor of C<sub>g</sub> applied to the tabulated I<sub>t</sub>. However, if M cables in the group carry loads which are not greater than 0.3C<sub>g</sub> I<sub>t</sub> amperes, the other cables can be sized by using the group rating factor corresponding to (N-M) cables.

**Table 7 : Correction Factor for Cables with More Than 4 Loaded Cores**

|                     |      |      |      |      |      |      |      |
|---------------------|------|------|------|------|------|------|------|
| No. of Loaded Cores | 5    | 6    | 7    | 10   | 12   | 14   | 19   |
| Correction Factor   | 0.72 | 0.67 | 0.63 | 0.56 | 0.53 | 0.51 | 0.45 |
| No. of Loaded Cores | 24   | 27   | 30   | 37   | 44   | 46   | 48   |
| Correction Factor   | 0.42 | 0.40 | 0.39 | 0.36 | 0.34 | 0.33 | 0.33 |

Note: 1. The current-carrying capacity for a cable in the size range 1.5 to 4mm<sup>2</sup>, having more than 4 loaded cores, is obtained by multiplying the current-carrying capacity of a 2-core, having the same installation type, by the factor selected from this table. The current-carrying for the 2-core cable is that for the installation condition to be used for the multi-core cable.

2. If due to known operating conditions, a core is expected to carry not more than 30% of its current-carrying capacity in the multi-core cable, it may be ignored for the purpose of obtaining the correction factor for the number of loaded cores.

3. If due to known operating conditions, a core is expected to carry not more than 30% of its rating, after applying the correction factor for the total number of current-carrying cores, it may be ignored for the purpose of obtaining the correction factor for the number of loaded cores.

For example, the current-carrying capacity of a cable having N loaded cores would normally be obtained by multiplying the current-carrying capacity of a 2-core, having the same insulation type, by the factor selected from this table for N cores. That is  $I_{z1c} = I_{z2c} \times C_{gN}$  where:

$I_{z1c}$  is the current-carrying capacity for the multi-core cable after applying the correction factor for the total number of current-carrying cores.

$I_{z2c}$  is the tabulated current-carrying capacity of a 2-core cable, having the same insulation type as the multi-core cable.

$C_{gN}$  is the correction factor from Table 7 for the total number of current-carrying cores.

However, if M cores in the cable carry loads which are not greater than  $0.3 \times I_{z2c} \times C_{gN}$ , the current-carrying capacity can be obtained by using the correction factor corresponding to (N-M) cores.

The 'not greater than  $0.3 \times I_{z2c} \times C_{gN}$ ' calculation should be applied before the adjacent multi-core cable grouping factor, if applicable, from Table 6 from BS 7671. The 30% rule should not be further applied to any adjacent cable grouping factor calculations.

$I_{z1c}$  should be greater than or equal to  $I_n$  or  $I_b$  as appropriate, divided by the relevant correction factor(s) C, that is  $I_{z1c} \geq I_n / C$  or  $I_b / C$

**Table 13 : DIN 47100 with Colour Repetition for Multi-Core LiYY, LiYCY Control Cables to DIN VDE 0812**

| No. | Colour | No. | Colour A     | Colour B | No. | Colour A     | Colour B | No. | Colour A     | Colour B |
|-----|--------|-----|--------------|----------|-----|--------------|----------|-----|--------------|----------|
| 1   | White  | 11  | Grey-pink    |          | 28  | Yellow-grey  |          | 45  | White        |          |
| 2   | Brown  | 12  | Red-blue     |          | 29  | Pink-green   |          | 46  | Brown        |          |
| 3   | Green  | 13  | White-green  |          | 30  | Yellow-pink  |          | 47  | Green        |          |
| 4   | Yellow | 14  | Brown-green  |          | 31  | Green-blue   |          | 48  | Yellow       |          |
| 5   | Grey   | 15  | White-yellow |          | 32  | Yellow-blue  |          | 49  | Grey         |          |
| 6   | Pink   | 16  | Yellow-brown |          | 33  | Green-red    |          | 50  | Pink         |          |
| 7   | Blue   | 17  | White-grey   |          | 34  | Yellow-red   |          | 51  | Blue         |          |
| 8   | Red    | 18  | Grey-brown   |          | 35  | Green-black  |          | 52  | Red          |          |
| 9   | Black  | 19  | White-pink   |          | 36  | Yellow-black |          | 53  | Black        |          |
| 10  | Violet | 20  | Pink-brown   |          | 37  | Grey-blue    |          | 54  | Violet       |          |
|     |        | 21  | White-blue   |          | 38  | Pink-blue    |          | 55  | Grey-pink    |          |
|     |        | 22  | Brown-blue   |          | 39  | Grey-pink    |          | 56  | Red-blue     |          |
|     |        | 23  | White-red    |          | 40  | Pink-red     |          | 57  | White-green  |          |
|     |        | 24  | Brown-red    |          | 41  | Grey-black   |          | 58  | Brown-green  |          |
|     |        | 25  | White-black  |          | 42  | Pink-black   |          | 59  | White-yellow |          |
|     |        | 26  | Brown-black  |          | 43  | Blue-black   |          | 60  | Yellow-brown |          |
|     |        | 27  | Grey-green   |          | 44  | Red-black    |          | 61  | White-grey   |          |


**Table 14 : DIN 47100 with Colour Repetition for Multi-Pair LiYY-TP, LiYCY-TP Cables to DIN VDE 0812, Pairs Are Repeated After the 22<sup>nd</sup> Pair, then Repeated After 44 Pairs Again**

| Pair | A Wire       | B Wire       | Pair | A Wire      | B Wire       |
|------|--------------|--------------|------|-------------|--------------|
| 1    | White        | Brown        | 12   | White/red   | Brown/red    |
| 2    | Green        | Yellow       | 13   | White/black | Brown/black  |
| 3    | Grey         | Pink         | 14   | Grey/green  | Yellow/grey  |
| 4    | Blue         | Red          | 15   | Pink/green  | Yellow/pink  |
| 5    | Black        | Violet       | 16   | Green/blue  | Yellow/blue  |
| 6    | Grey/pink    | Red/blue     | 17   | Green/red   | Yellow/red   |
| 7    | White/green  | Brown/green  | 18   | Green/black | Yellow/black |
| 8    | White/yellow | Yellow/brown | 19   | Grey/blue   | Pink/blue    |
| 9    | White/grey   | Grey/brown   | 20   | Grey/red    | Pink/red     |
| 10   | White/pink   | Pink/brown   | 21   | Grey/black  | Pink/black   |
| 11   | White/blue   | Brown/blue   | 22   | Blue/black  | Red/black    |

**Explanation of Colour Code Identification as Follows:**

Multi-coloured code identification for core or pair are combined with a basic colour and a colour in form of rings or stripe.

In reference to Table 13, Colour A is the base colour, and Colour B is the secondary colour in the form of rings, printed on top of Colour A. Each ring separation is 2-3mm. The cores are counted in one direction from the outer layer in.

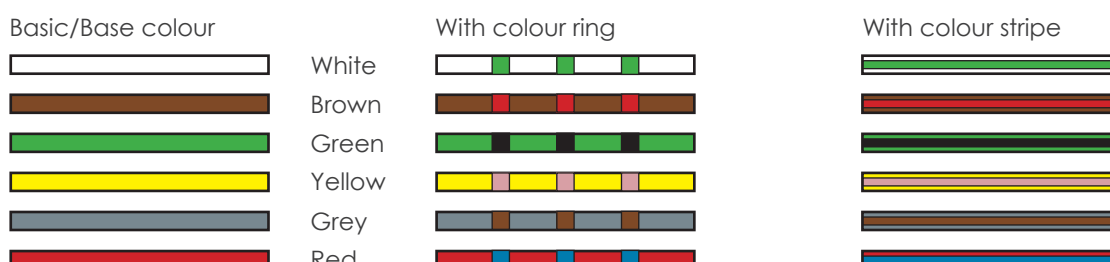

**Table 15 : For LIYY, LIYCY (1 ~ 4-Core) Cables**

| Cross-sectional Area | No./Diam. of Strand | Maximum Conductor Resistance at 20°C | Capacitance at 800Hz, 20°C | Capacitance at 800 Hz, 20°C |                | Minimum Insulation Resistance | Voltage Test (1 min) | Current Rating at 30°C |
|----------------------|---------------------|--------------------------------------|----------------------------|-----------------------------|----------------|-------------------------------|----------------------|------------------------|
|                      |                     |                                      | Between cores              | Between pairs               | Pair to ground |                               |                      |                        |
| (mm <sup>2</sup> )   | (no./mm)            | (Ω/km)                               | (nF/km)                    | (nF/km)                     | (nF/km)        | (MΩ·km)                       | (V)                  | (A)                    |
| 0.14                 | 18/0.10             | 148                                  | 80                         | 120                         | 160            | 200                           | 1200                 | 1.5                    |
| 0.25                 | 14/0.15             | 79.9                                 | 100                        |                             |                |                               | 2.5                  |                        |
| 0.34                 | 7/0.25              | 58.0                                 | 100                        |                             |                |                               | 4                    |                        |
| 0.5                  | 16/0.20             | 39.0                                 | 110                        |                             |                |                               | 7                    |                        |
| 0.75                 | 24/0.20             | 26.0                                 | 110                        |                             |                |                               | 12                   |                        |
| 1                    | 32/0.20             | 19.5                                 | 120                        |                             |                |                               | 15                   |                        |
| 1.5                  | 30/0.25             | 13.3                                 | 120                        |                             |                |                               | 18                   |                        |

**Table 16 : UL 1581, Conductor Configuration and D.C. Resistance**

| Conductor Size | Class (UL) | Configuration |            | Approx. Diam. | Maximum D.C. Resistance at 20°C |        |
|----------------|------------|---------------|------------|---------------|---------------------------------|--------|
|                |            | (AWG)         | (mm)       |               | Plain                           | Tinned |
| (AWG)          |            | (AWG)         | (mm)       | (mm)          | (Ω/km)                          | (Ω/km) |
| 24             | B          | 7 x 32        | 7 x 0.203  | 0.579         | 87.6                            | 94.2   |
| 22             | B          | 7 x 30        | 7 x 0.254  | 0.729         | 55.4                            | 59.4   |
| 20             | B          | 7 x 28        | 7 x 0.320  | 0.919         | 34.6                            | 36.7   |
| 18             | B          | 7 x 26        | 7 x 0.404  | 1.16          | 21.8                            | 23.2   |
| 16             | C          | 19 x 29       | 19 x 0.287 | 1.49          | 13.7                            | 14.9   |
| 14             | C          | 19 x 27       | 19 x 0.361 | 1.87          | 8.62                            | 9.32   |
| 12             | C          | 19 x 25       | 19 x 0.450 | 2.35          | 5.43                            | 5.88   |

**Table 17 : UL 1581, Single/Solid Wire Diam.**

| Conductor Size | Nominal Diam. | Minimum Diam. | Conductor Size | Nominal Diam. | Minimum Diam. | Conductor Size | Nominal Diam. | Minimum Diam. |
|----------------|---------------|---------------|----------------|---------------|---------------|----------------|---------------|---------------|
| (AWG)          | (mm)          | (mm)          | (AWG)          | (mm)          | (mm)          | (AWG)          | (mm)          | (mm)          |
| 40             | 0.079         | 0.077         | 28             | 0.320         | 0.312         | 16             | 1.29          | 1.26          |
| 39             | 0.089         | 0.087         | 27             | 0.361         | 0.353         | 15             | 1.45          | 1.42          |
| 38             | 0.102         | 0.100         | 26             | 0.404         | 0.396         | 14             | 1.63          | 1.60          |
| 37             | 0.114         | 0.112         | 25             | 0.455         | 0.444         | 13             | 1.83          | 1.79          |
| 36             | 0.127         | 0.125         | 24             | 0.511         | 0.500         | 12             | 2.05          | 2.01          |
| 35             | 0.142         | 0.139         | 23             | 0.574         | 0.561         | 11             | 2.30          | 2.26          |
| 34             | 0.160         | 0.157         | 22             | 0.643         | 0.630         | 10             | 2.588         | 2.537         |
| 33             | 0.180         | 0.177         | 21             | 0.724         | 0.709         | 9              | 2.906         | 2.847         |
| 32             | 0.203         | 0.199         | 20             | 0.813         | 0.798         | 8              | 3.264         | 3.198         |
| 31             | 0.226         | 0.222         | 19             | 0.912         | 0.894         | 7              | 3.665         | 3.592         |
| 30             | 0.254         | 0.249         | 18             | 1.020         | 1.000         | 6              | 4.115         | 4.034         |
| 29             | 0.287         | 0.282         | 17             | 1.150         | 1.130         | 5              | 4.620         | 4.529         |